

# Q.bloxx A103

## Multi-Channel Module for Voltages



Q.bloxx is the ideal DAQ solution for widely distributed installations, electrical panels, and environmental enclosures. Q.bloxx measurement modules provide integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for quick system expansion. Flexibility in distribution allows for highly synchronized data that is less prone to noise due to shorter sensor cable runs to the actual point of measurement.

- RS 485 fieldbus interface up to 24 Mbps: LocalBus up to 115.2 kbps: Modbus-RTU, ASCII
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Connectable to any Controller, e.g. Q.station, Q.gate or Q.pac
- Power supply 10 ... 30 VDC
- DIN rail mounting (EN60715)




### Key Features

- 8 galvanic isolated input channels  
differential voltage, current via shunt connector Isolation voltage 100 VDC
- High accuracy digitalization  
24 bit ADC, 100 Hz sample rate per channel
- 2 digital in and 2 outputs  
input: state, tare, memory reset  
output: state, alarm, threshold
- Signal conditioning  
linearization, digital filter, average, scaling, min/max storage, arithmetic, alarm
- Galvanic isolation  
channel to channel, isolation voltage 100VDC, power supply and interface, isolation voltage 500 VDC

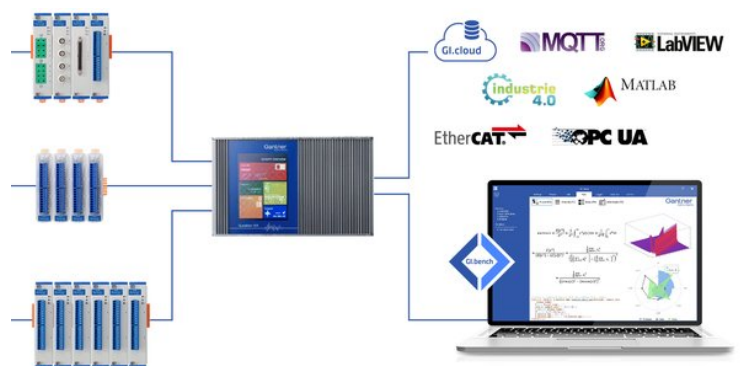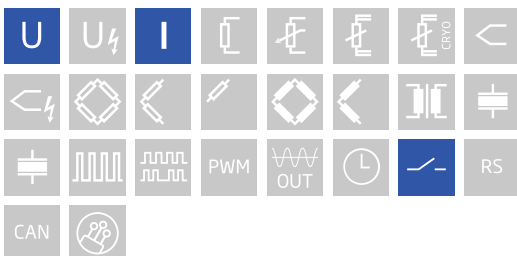

### Block diagram

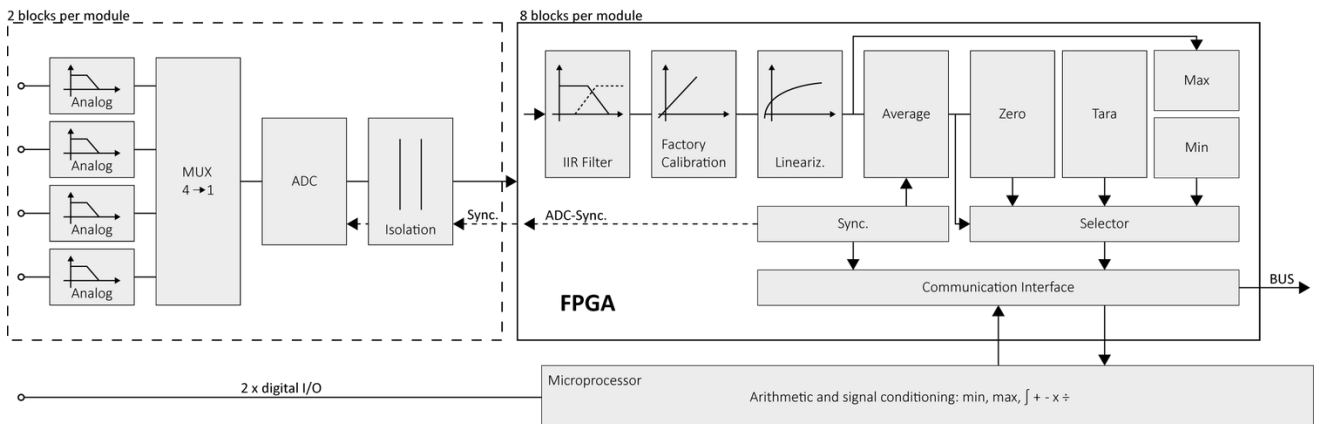

### Technical Data

#### Analog Input

Channels	8
Accuracy	0.01 % typical
	0.025 % in controlled environment <sup>1</sup>
	0.05 % in industrial area <sup>2</sup>
Linearity error	0.01 % typical full-scale
Repeatability	0.003 % typical (within 24 h)
Isolation voltage	500 VDC channels to power supply channel to bus <sup>3</sup>
	100 VDC continuous, channel to channel

<sup>1</sup> according to EN 61326 2006: appendix B

<sup>2</sup> according to EN 61326 2006: appendix A

<sup>3</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

#### Measurement Mode Voltage

Error	Range	max. Error	Resolution
	±10 V	±2 mV	40 µV
Input impedance	>1 MΩ		
Long-term drift	<50 µV / 24 h	<500 µV / 8000 h	
Temperature influence	Offset drift	Gain drift	
	<50 µV / 10 K	<0.025 % / 10 K	
Signal-to-noise ratio	>100 dB at 100 Hz	>120 dB at 1 Hz	
Overvoltage protection	± 200 V		

### Measurement Mode Current (Only with Q.series Terminal SR [791989])

Input range	±25 mA
Margin of error	±22 µA
Resolution	400 nA
Long-term stability	500 nA / 24 hrs
Temperature drift	<75 ppm / 10 K
Input impedance	100 Ω

### Analog/Digital-Conversion

Resolution	24-bit
Update rate	100 Hz per channel
Modulation method	Sigma-Delta
Anti-aliasing filter	20 Hz, 3rd order
Digital filters	Infinite impulse response (IIR), low-pass, high-pass, band-pass, Butterworth or Bessel (2nd, 4th, 6th or 8th order), frequency range 0.1 Hz to 10 Hz (adjustable via software)
Averaging	configurable or automatic according to the user-defined data rate

### Digital In-/Outputs

Channels	4, 2 digital inputs and 2 digital outputs
Input	status, tare, reset
Input voltage / input current	max. 30 VDC / max. 0,5 mA
Lower / upper threshold	<2.0 V (low) / >10 V (high)
Output	status, alarm
Contact	open drain p-channel MOSFET
Load capacity	30 VDC / 100 mA (ohmic load)

### Communication interface

Protocols	proprietary Localbus (115200 bps to 24 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU Profibus-DP (19200 bps to 12 Mbps) (special Firmware required)
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

### Power Supply

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx. 2 W
Input voltage influence	<0.001 % / V

### Environmental

Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 % to 95 % at 50°C, non-condensing

# Q.bloxx A103

Multi-Channel Module for Voltages

## Remarks

Warm-up time	Validity of all listed specifications are subject to a warm-up period of at least 45 minutes
	Specifications subject to change without notice

## Mechanical information

Material	Aluminum and ABS
Measurements (W x H x D)	27 x 120 x 105 mm
Weight	approx. 200 g

## Ordering Information

Article number	898795
Accessories	Terminal SR, article number 791989

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
 Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
 www.gantner-instruments.com