

# Q.bloxx A109

## Analog Output Module with Digital I/Os



Q.bloxx is the ideal DAQ solution for widely distributed installations, electrical panels, and environmental enclosures. Q.bloxx measurement modules provide integrated signal conditioning and arithmetic functions, packaged in modular, DIN Rail mountable enclosures that easily snap together for quick system expansion. Flexibility in distribution allows for highly synchronized data that is less prone to noise due to shorter sensor cable runs to the actual point of measurement.

- RS 485 fieldbus interface up to 24 Mbps: LocalBus up to 115.2 kbps: Modbus-RTU, ASCII
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Connectable to any Controller, e.g. Q.station, Q.gate or Q.pac
- Power supply 10 ... 30 VDC
- DIN rail mounting (EN60715)



### Key Features

- 4 Analog output channels  
voltage ( $\pm 10$  VDC) or current (0 - 20 mA), configurable per channel
- DAC-resolution 16 bit  
100 kHz each channel
- Outputs freely scalable
- 4 digital inputs and outputs  
configurable as 2 counter, 2 frequency, or 2 PWM inputs, 4 frequency out, 4 PWM output or 4 state out
- Frequency measurement  
Frequency measurement up to 1 MHz, direction detection
- Counter  
Forward-backward counter, quadrature counter with reference position recognition (reset/enable), up to 1 MHz
- PWM input  
Measurement of duty cycle and frequency
- 3-Way galvanic isolation  
500 VDC channel to channel, channel to power supply, and bank

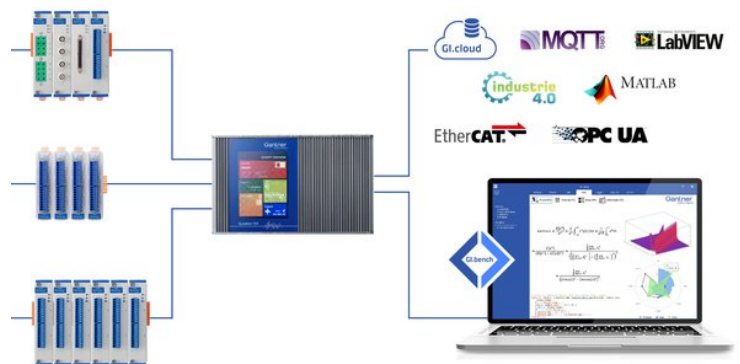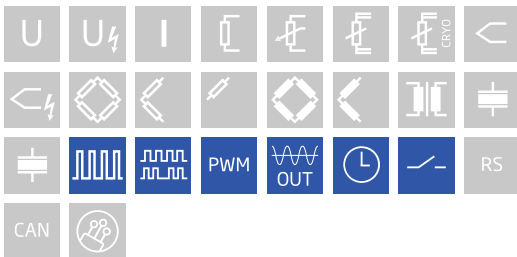

### Technical Data

#### Analog Output

Channels	4
Accuracy	0.02 % typical
Output type	voltage or current, configurable per channel
Isolation voltage	500 VDC channel to channel to power supply channel to bus <sup>1</sup>

<sup>1</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

#### Output Mode Voltage

Output voltage	±10 VDC	
Allowable load resistance	> 2 kΩ	
Long-term drift	< 1 mV / 24 hrs	< 2.5 mV / 8000 hrs
Temperature influence	< 2 mV / 10 K Offset drift	< 0.05 % / 10 K Gain drift
Noise voltage	< 10 mV at 1000 Hz	< 2 mV at 10 Hz

#### Current Output

Output current	0 - 20 mA	
Load burden	< 400 Ω	
burden influence	< 0.1 μA / Ω	
Long-term stability	< 2 μA / 24 hrs	< 5 μA / 8000 hrs
Temperature drift	< 4 μA / 10 K Offset drift	< 0.05 % / 10 K Gain drift
Noise current	< 20 μA at 1000 Hz	< 4 μA at 10 Hz

#### Digital Input

Channels	4
Logic levels	TTL or 24 VDC according to IEC 61131-2, Type 1
TTL logic voltage	< 0.8 VDC (Low) > 3 VDC (High)
24 VDC logic voltage	-3 to 5 VDC (Low) 11 to 30 VDC (High)
Input type	PNP (current sinking)
Input voltage	30 VDC max.
Input current	2 mA max.
Isolation voltage	500 VDC, group to group, group to power supply, channel to bus <sup>1</sup>

<sup>1</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

### Digital Input Modes

Status	
Response time	10 $\mu$ s
Frequency measurement	
Method	Chronos method (optimized by a combination of time measurement and pulse counting), detection of rotational direction (0 deg. / 90 deg.)
Frequency range	0.1 Hz to 1 MHz
Time base	0.001 s to 1 s
Internal reference frequency	48 MHz
Accuracy	0.01% at timebase > 1ms
Resolution	21 ns
Pulse counting	
Accuracy	0.01% at timebase > 1ms
Resolution	21 ns
Counter frequency	1 MHz
Mode(s) of operation	- Forward and reverse counting (additional input for direction of counting) - Quadrature counter (additional input for detection of rotational direction) - Quadrature counter with zero reference and reset/enable (two additional inputs)
Pulse-width measurement	
Input frequency	0.1 Hz to 1 MHz
Accuracy	0.01% at timebase > 1ms
Resolution	21 ns

### Digital Output

Channels	4
Contact	open drain p-channel MOSFET
Output voltage	12 to 30 VDC (external supply required)
Load capacity	30 VDC / 500 mA (ohmic load)
Isolation voltage	500 VDC, group to group, group to power supply, channel to bus <sup>1</sup>

<sup>1</sup> noise pulses up to 1000 VDC, continuous up to 250 VDC

### Digital Output Modes

Status			
Response time	10 $\mu$ s (>0.5 A)	100 $\mu$ s (>0.1 A)	1000 $\mu$ s (<0.1 A)
Frequency output			
Frequency range	0.1 Hz to 1 kHz / 10 kHz (depending on load capacity)		
Accuracy	0.1 %		
Resolution	1 $\mu$ s		
PWM output			
Frequency range	0.1 Hz to 1 kHz / 10 kHz (depending on load capacity)		
Accuracy	0.1 %		
Resolution	1 $\mu$ s		

# Q.bloxx A109

Analog Output Module with Digital I/Os

## Digital to Analog Conversion

Resolution	16-bit
Update rate	100 kHz per channel
Settling time	3 $\mu$ s

## Communication Interface

Protocols	proprietary Localbus (115200 bps to 24 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU Profibus-DP (19200 bps to 12 Mbps) (special Firmware required)
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

## Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	2 W (approx.)
Input voltage influence	<0.001 % / V

## Environmental Specifications

Electromagnetic compatibility	according to IEC 61000-4 and EN 55011
Operating temperature	-20°C to +60°C
Storage temperature	-40°C to +85°C
Relative humidity	5 - 95 % at 50°C (non-condensing)

## Remarks

Validity of all listed specifications are subject to a warm-up period of at least 45 minutes

Specifications subject to change without notice

## Mechanical information

Material	Aluminum and ABS
Measurements (W x H x D)	27 x 120 x 105 mm
Weight	approx. 200 g

## Ordering Information

Article number	791484
----------------	--------

## Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com