

# Q.bloxx XL F108

## Optical Gage Amplifier


All the benefits of fiber optic measurement without the hassle. The F108 Optical Gage Amplifier seamlessly integrates with the Q.series-X data acquisition platform. Benefit from the modularity and versatility of the Q.series X product line to address any of your measurement challenges. Connect with GI.bench software for the quick and easy setup for your multi-channel DAQ system for GI.cloud-based storage and monitoring.

- RS485 fieldbus interface up to 48 Mbps: LocalBus, up to 115.2 kbps: Modbus-RTU, ASCII
- Electromagnetic Compatibility according to EN61000-4 and EN55011
- Connectable to Controller Q.station X
- Power supply 10 ... 30 VDC
- DIN rail mounting (EN60715)



### Key Features


- **8 Universal optical input channels**  
Strain up to 1,100  $\mu\text{m}/\text{m}$   
Pressure up to 10,000 PSI  
Acceleration up to 1,000 g (peak)  
Temperature up to 1,000 °C
- **High Sampling Speed**  
Measurement bandwidth up to 50 kS/s
- **Long transmission distance**  
up to 25 km
- **Electrical Noise Immunity & Complete Isolation**
- **Low measurement uncertainty**  
Complete measurement chain capable of achieving a maximum uncertainty of  $\pm 0.5\%$  FSO from transducer to digitization. For temperature, this equates to  $\pm 0.5^\circ\text{C}$  over a  $200^\circ\text{C}$  range.
- **Typical operating environments**  
Cryogenic and ultra-high temperature  
Electromagnetic radiation  
High-voltage  
Ionizing (gamma) radiation  
Hazardous areas

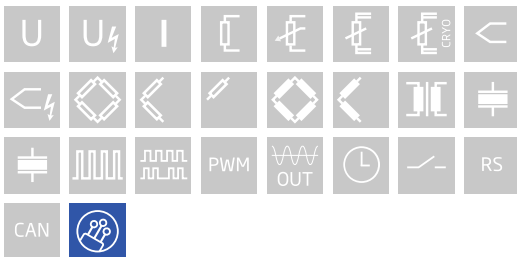

# Q.bloxx XL F108

Optical Gage Amplifier

## Block diagram

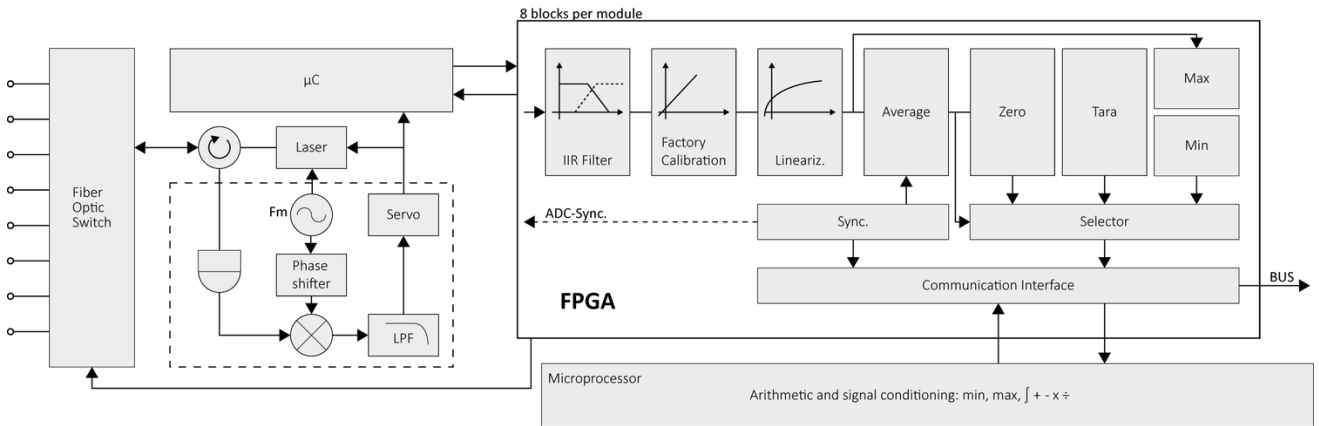

## Technical Data

### Optical Inputs

Channels	1 to 8
Supported transducer types	Temperature, strain, pressure, acceleration, vibration, displacement
Single channel sampling rate	50 k samples per second (kS/s)
Multi channel sampling rate	1 sample per second (S/s)
Connector	E2000 APC
Wavelength-range	1548 nm - 1552 nm
Wavelength resolution	0.1 pm
Uncertainty	± 5 pm
Repeatability	± 1 pm
Laser specification	Class 1 laser

### Communication Interface

Protocols	proprietary Localbus (115200 bps to 48 Mbps, latency <100 ns) ASCII (19200 bps to 115200 bps) Modbus RTU
Data format	8E1
Electrical standard	ANSI/TIA/EIA-485-A, 2-wire

### Input Power

Input voltage	10 to 30 VDC, overvoltage and overcurrent protection
Power consumption	approx. 15 W

### Environmental Specifications

Electromagnetic compatibility (EMC)	IEC 61326-1
Operating temperature	0 °C to 50 °C
Storage temperature	-40 °C to 85 °C
Relative humidity	5 % to 95 % at 50°C, non-condensing

# Q.bloxx XL F108

## Optical Gage Amplifier

### Remarks

Warm-up time	Validity of all listed specifications are subject to a warm-up period of at least 45 minutes
	Specifications subject to change without notice

### Mechanical information

Material	Aluminium and ABS
Measurements (W x H x D)	60x 145 x 135mm
Weight	approx. 700 g

### Ordering Information

Article number	606929
----------------	--------

### Gantner Instruments

Austria | Germany | France | Sweden | India | USA | China | Singapore  
Montafonerstraße 4 · A-6780 Schruns · T +43 55 56 · 77 463-0

office@gantner-instruments.com  
www.gantner-instruments.com